

MultiWan Router HTTP DEVELOPMENT SPEC

Version: 1.0.001

DOC NO: XXXXXXXX

Project Name:		Internal
Project Code:		Confidential
Doc Name: HTTP API DEVELOPMENT SPEC		
Version:	1.0	Doc No: xxxxxxxx
Release	001	File:
Prepared by:	Xiong jiao	Date:
Endorsed by:		Date:
Accepted by:		Date:
	Doc. Effective Date:	Date:
	Date of Expiry:	Date: N/A

Related Document	
Doc No.	Description

Distribution	
Copy No.	Holder
1	
2	

Amendment History					
Change Number	Revision Description	Pages Affected	Revision Number	Changed By	Date
001	First draft	All	1.0	PengJian	2015.05.18
002	Modify some message interfaces	5.2.4, 5.3.1 5.3.4, 6.2.3	1.1	PengJian	2015.06.03
003	Implement and modify goip_send_cmd.htm Increase SMS task attribute coding, smsc	4.1.3 5.3.1.3	1.1	PengJian	2015.01.29
004	Modify and implement get and customize device status	3.1.1, 3.1.2	1.2	PengJian	2016.04.17
005	Increase the save/reset command interface	4.1.3	1.2	PengJian	2016.06.13
006	Increase the get/set command interface	4.1.2	1.2	PengJian	2016.06.20
007	Increase SMS query interface	7	1.3	PengJian	2016.06.22
008	1. Add query SMS statistics and query call statistics interface 2. Merge device-related HTTP documents and modify the document name		1.8	LiGuanBin	2019.01.03
009	Add example	5.4	1.9	Xiongjiao	2019.06.27
010	Increase the parameter of mode	4.12		LiGuanBin	2020.04.01

Table of Content

1	OVERVIEW.....	1
2	COPYRIGHT NOTICE.....	1
3	STATUS NOTIFICATION.....	1
3.1.1	<i>URL.....</i>	<i>1</i>
3.1.2	<i>Parameter.....</i>	<i>1</i>
3.1.3	<i>Dev-status message.....</i>	<i>2</i>
3.1.4	<i>Port -status message.....</i>	<i>3</i>
4	OPERATE COMMAND SENDING.....	4
4.1.1	<i>Command sending URL.....</i>	<i>4</i>
4.1.2	<i>Parameter.....</i>	<i>4</i>
4.1.3	<i>Data.....</i>	<i>5</i>
5	SMS SENDING.....	6
5.1	TOPOLOGY.....	6
5.2	SMS SENDING FLOW CHART.....	7
5.2.1	<i>SMS sending.....</i>	<i>7</i>
5.2.2	<i>Sending status report.....</i>	<i>7</i>
5.2.3	<i>Sending status query.....</i>	<i>7</i>
5.2.4	<i>Status query.....</i>	<i>8</i>
5.2.5	<i>Pause the SMS task.....</i>	<i>8</i>
5.2.6	<i>Resume the paused SMS task.....</i>	<i>8</i>
5.2.7	<i>Delete the SMS task.....</i>	<i>8</i>
5.2.8	<i>Query the SMS task.....</i>	<i>8</i>
5.3	MESSAGE DESCRIPTION.....	8
5.3.1	<i>SMS Sending.....</i>	<i>8</i>
5.3.2	<i>Task send report.....</i>	<i>11</i>
5.3.3	<i>Task send status query.....</i>	<i>13</i>
5.3.4	<i>Pause the SMS task.....</i>	<i>14</i>
5.3.6	<i>Delete the SMS task.....</i>	<i>17</i>
5.3.7	<i>Query the SMS task.....</i>	<i>18</i>
5.4	EXAMPLE.....	20
6	SMS FORWARDING.....	20
6.1	TOPOLOGY.....	20
6.2	SMS FORWARDING.....	20
6.2.1	<i>SMS Forward URL.....</i>	<i>20</i>
6.2.2	<i>Parameter.....</i>	<i>21</i>
6.2.3	<i>Data.....</i>	<i>21</i>
7	QUERY SMS.....	21
7.1	QUERY PROCESS.....	22
7.2	MESSAGE DESCRIPTION.....	22
7.2.1	<i>URL.....</i>	<i>22</i>
7.2.2	<i>Parameter.....</i>	<i>22</i>
7.2.3	<i>Data.....</i>	<i>22</i>
8	QUERY SMS STATISTICS.....	24
8.1	MESSAGE DESCRIPTION.....	24
8.1.1	<i>URL.....</i>	<i>24</i>
8.1.2	<i>Parameter.....</i>	<i>24</i>
8.1.3	<i>Response.....</i>	<i>25</i>

9	QUERY CALL STATISTICS.....	26
9.1	MESSAGE DESCRIPTION.....	26
9.1.1	<i>URL</i>	26
9.1.2	<i>parameter</i>	26
9.1.3	<i>Response</i>	2

1 Overview

This document specifies HTTP MultiWan Router API of Skyline device, include SMS receiving, single sending, group-sending and status of Sending task querying.

This SMS API is still base on HTTP, and add POST request support, it provide multitask and status report by JSON array. About JSON array format, please refer its standardization state.

2 Copyright Notice

This document is just for R&D team reference. If in need, it can be offered to a cooperation project developer.

3 Status Notification

This device will send a HTTP POST request which include the device running status information to the SMS server when it reaches either of below conditions.

1. One of device port status changed.
2. Community period expired.

3.1.1 URL

Server can send a GET request to get the status on device by below URL:

http://host:port/goip_get_status.html?url=xxx&period=0

Device report url:

Server send a get request like above to specific the URL.

3.1.2 Parameter

Parameter	Description	Default	Required	Remark
Url	Specific the report URL	None	N	Tips: Special characters need do URL encode Just need specific once time.
Period	Report period	60	N	>0:Report status according to the specified report period, the minimum value is 60, the unit is second

				0:cancel status report
all_sims	Get all the card status	0	N	0: disable 1: enable

3.1.3 Dev-status message

Device send 'dev-status' to server periodically.

dev-status message (information in HTTP message Body) is a JSON array string that comprised of ports status. Parameter Content-Type in HTTP head should set to

"application/json;charset=utf-8".

```
{ "type" : "dev-status" , "seq" : 1, "expires" :180, "mac" : "00-30-f1-01-02-03" , "ip" :
"192.168.1.67" , "max-ports" :32, "max-slots" :4, "status" :[{ "port" : "1A" ,...}, { "port" :
"2B" ,...}, ... , { "port" : "32D" ,...}]}
```

Components state:

Parameter	Data type	Description	Default	Required
Type	String	Message type.	None	Y (dev-status)
seq	Int	Device status message sequence number, start from 1.	None	Y
expires	Int	Dev-status sending period.	180s	N
mac	String	Device MAC.	None	Y
ip	String	Device IP address.	None	Y
max-ports	Int	Total ports of device.	None	Y
max-slots	String	Total SIM slots of device.	1	N
status	array	Status of device port.	None	Y

For the description of the port status, see 3.1.4 [Port Status]

3.1.4 Port -status message

Any one port status changed, device will send 'port-status' message to server immediately.

Status message (information in HTTP message Body) is a JSON array string that comprised of ports status. Parameter Content-Type in HTTP head should set to

"application/json;charset=utf-8".

```
{ "type" : "port-status" , "port" : "2B" , "seq" : 1, "status" : "3 OK" , "bal" :
"100.00" , "opr" : "46000 China Mobile" , "sn" : "139xxxxxxxx" , "imei" : "86xxxxxxxxxxxx" ,
```

“imsi” : “xxx” , “iccid” : “xxx” }

Components state:

Parameter	Data type	Description	Default	Required
Type	String	Message type	None	Y (port-status)
port	String	Describe the current working port and SIM slot. Like 1.01,1.02.....32.04	None	Y
seq	Int	The port is incremented from port 1		
st	string	Port status code + detail 0: No SIM card 1: Exist idel SIM card 2: Registering 3: Registered 5: no balance or alarm 6: Register failed 7: SIM card locked by device 8: SIM card locked by operator 9: Recognize SIM card error 11: Card Detected 12: User locked	None	Y
bal	Floating point	SIM card balance (yy.mm)	None	Y
opr	String	SIM card operator name and ID valid while parameter “st” equal to 3 or 4	None	N
sn	string	SIM number	None	N
imei	string	IMEI of module	None	N
imsi	string	IMSI num of SIM card	None	N
iccid	string	ICCID num of SIM card	None	N

4 Operate command sending

Device offer API to server to change device status, like change sim card, lock/unlock port, reboot device. About USSD command sending, please refer to “SkylineHTTP-USSD API (V1.0).docx” ;

Device will send message to the server by port status notification when lock port or change SIM card.

4.1.1 URL

http://host:port/goip_send_cmd.html

host: Device IP address

port: Device webpage management port, default value is 8080

4.1.2 Parameter

Parameter	Description	Default	Required	Ramark
Version	API version	1.1	Y	This document describes specification support only
username	Device account	None	Y	
Password	Device password	None	Y	
Op	Operation description	None	N	get:get device configuration set: set device configuration lock: lock port unlock:unlock port reset: reboot module save: save configuration reboot: reboot device redial: sim redial(Note: 1. Check the status of the SIM Before redial, don't redial when the status is not "dial successful" 2. The redial cycle should not be too short, and the cycle should be random in a range, in case the operator detection is abnormal 3. If the status of sim is abnormal, can reset the module and wait for a period of time until the sim works properly)
mode	SIM Redial mode	None	N	0:flight mode (sim will re-registration) 1:fast mode(sim don' t re-registration) Note:not configuring this

				parameter will use default mode,it' s the same as mode=0. You may get a new IP in flight mode,but may not in fast mode.
par_name(n)	Parameter name of the get/set operation	The value of the set operation	N	<p>The name of the parameter to be actually operated. If the parameter is an array parameter, you can use parentheses with parameters, and the subscript starts from 0.</p> <p>Sms_url: destination URL for SMS push</p> <p>data_service_enable: (0: disable 1: enable)</p> <p>Ports_rx_tx</p> <p>port_public_ip</p> <p>Port_public_ip(num), num represents the port number that needs to be get, and the value of num variable starts from 0.</p> <p>Port_rx_tx(num), num represents the port number that needs to be get, and the value of num variable starts from 0.</p>

4.1.3 Data

Device support a single command to operate multi-ports and multi-commands to operate different port.

Command sending message (information in HTTP message Body) is a JSON array string that composed by one or more command. Parameter “Content-Type” in HTTP head should set to “application/json;charset=utf-8”.

```
{"type": "command", "op": "lock", "ports": "1A, 2B, 3C, 4-32", "ops": [{"op": "lock", "ports": "1A"}, {"op": "redial", "ports": "2B"}]}
```

Components state:

Parameter	Data Type	Description	Default	Required
type	string	Message type	None	Y (command)
op	string	operation type lock: lock port unlock: unlock port reset: reboot module save: save configuration reboot: reboot device multiple: multiple command	None	Y
ports	string	the port NO. need to operate. all,*: all ports It is valid while op parameter equal to lock/unlock/reset	None	Y (op=lock op=unlock op=reset)
ops	array	Multi-command array Valid when op is multiple	None	Y (op= multiple)

Attributes of tasks in json data


Parameter	Data type	Description	Default	Required
op	string	Operation type lock: lock port unlock:unlock port switch:switch SIM card reset: reboot module Redial: sim redial	None	Y
ports	string	The port that needs to perform the operation: When op=reset, only the port number is valid.	None	Y

5 SMS Sending

Server send SMS sending request to device by Ethernet, and it keep sending task in a JSON array.

5.1 Topology

While device and server not in a same LAN, device HTTP port should be Nat mapping out on boundary router, so server can send message to device actively.

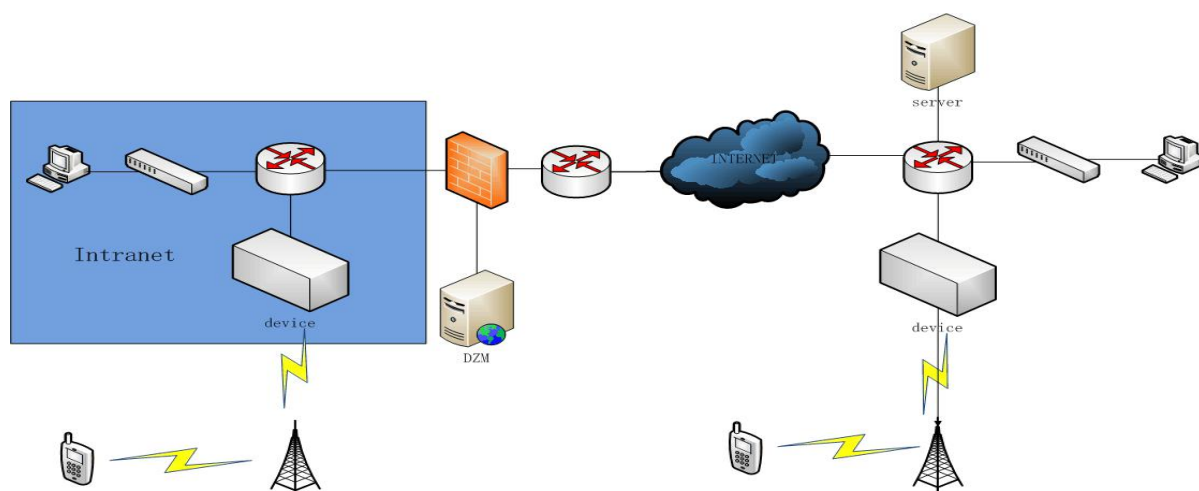

5.2 SMS sending flow chart

Server can send SMS by GET/POST request. GET request use API specified in http SMS sending API' document. POST request can be used to send long SMS (more than 300 characters) or send more than one SMS in a request message.

5.2.1 SMS sending

After got the SMS sending request from server, device will design a task ID (related to the sending report) to create one or more SMS sending task, and after those task finished, device will send 200ok message to server.

5.2.2 Sending status report

While SMS send successfully/failed/timeout, device will put the result in cache, after meet condition (cache storage full or cache time reached), device will send POST request to report one or more task execute result. If it is group sending, device will report execute result periodically until all num in this group sending task get a result.

5.2.3 Sending status query

Server can send a GET request to query task sending status, like successfully send statics, failed information (num and reason), current sending num and so on.

5.2.4 Pause the SMS task

When a SMS task is still waiting to be sent in the send queue, one or more SMS can be paused.

5.2.5 Resume the paused SMS task

Resume the sending of one or more suspended SMS tasks.

5.2.6 Delete the SMS task

Delete one or more SMS tasks waiting to be sent in the send queue.

5.2.7 Query the SMS task

Query the SMS task waiting to be sent in the send queue.

5.3 Message description

5.3.1 SMS Sending

5.3.1.1 URL

http://host:port/goip_post_sms.html

host: Device IP address

port: Device webpage management port, default value is 80.

5.3.1.2 Parameter

Parameter	Description	Default	Required	Remark
version	API version	1.0	N	1.0 : Compatible with previous API 1.1: Support for the description of this document
username	Device username	None	Y	
password	Device password	None	Y	

Note: All URL parameters only appear in the GET request. For POST, it will appear in the JSON attribute of the body segment. The following will not be explained.

5.3.1.3 Data

The task data (the body segment of the HTTP message) is a JSON format string consisting of one or more tasks, and the value of the HTTP header parameter "Content-Type" is "application/json;charset=utf-8".

`{"type": "send-sms", "task_num": n, "tasks": [{"tid": tid_1, ...}, ..., {"tid": tid_n, ...}]}`

Components state:

Parameter	Data type	Description	Default	Required	Remark
type	string	Message type	None	N	
sr_url	string	Status report forward url	System configuration	N	
sr_cnt	string	Max num of SMS result can keep in cache.	100	N	1. The buffer number reaches this value, the buffered report is sent immediately, and the timer is reset.
sr_prd	Int	The max time SMS result can keep in cache	30	N	2. The time expired, even if not enough reports are received, send immediately, then reset the timer
sms_url	string	SMS forward URL	System configuration	N	
sms_cnt	Int	Max num of SMS can keep in cache	1	N	1. When the buffer number reaches this value, the buffered SMS is sent immediately and the timer is reset. 2. In order to be compatible with old customers, this parameter must be set to a value greater than 1, in order to buffer the received SMS and use the new sending mechanism.
sms_prd	Int	Max time SMS can keep in cache	30	N	1. The time expired, even if not enough SMS is received, it is sent immediately, then the timer is reset.
task_num	string	Total task	1	Y	
tasks	Array	Specific SMS send task	None	Y	

Attributes of tasks in json data

Parameter	Data type	Description	Default	Required
tid	Int	Task ID	None	Y
from	String	Use ‘,’ ‘-’ to assign more than one port (from channel 1)	Choose of device	N
to	string	one or more (use ‘,’ to distinguish) recipients	None	Y

sms	string	SMS content	None	Y
chs	string	Character coding set (utf8 base64)	utf8	N
coding	Int	pecific the SMS codec: 0:not assign 1:USC2 2:7bit	0	N
smstype	Int	SMS type 0: SMS	0	N
smsc	string	Store the SMSC number.	“ ”	N
intvl	string	Interval of 2 SMS while device sending them(ms)	“0”	N
tmo	Int	Max time while waiting sending result(second).	30	N
sdr	Int	If enable the successfully send report. 1:enable,0:disable.	Disable	N
fdr	Int	If enable the failed report.1:enable,0:disable.	Enable	N
dr	Int	If enable SMS delivery report.1:enable,0:disable.	Disable	N
sr_prd	Int	Status report period (seconds), 0: not on, >0: on Control only the period in which a single task generates a report	60	N
sr_cnt	Int	Single-state report SMS number, less than 1 will use the default value Control only the number of processed messages that have been reported by a single task	10	N

Tips:

1. While not choose a port, device will pick up a random port to send SMS to every recipient.
2. While chose more than one ports, and just one SMS recipient , then device will use all chose port to send SMS to this recipient.
3. If more ports, and more recipient designed, then every port will send SMS to every recipient separately.

5.3.1.4 Response

Task sending is a JSON array composed by one or more task send status,
Parameter “Content-Type” in HTTP head should set to

“application/json;charset=utf- 8” .

```
{ "code" :200, "reason" : "OK", "type" : "task-status", "status" :[{ "tid" :tid_1,
"status" : "0 OK" },..., { "tid" :tid_n, "status" : "2 Invalid Port" }]}
```

Status components state:

Parameter	Data type	Description	Default	Required
tid	Int	Task ID	None	Y
status	String	Task status code 0: OK 1: Invalid User 2: Invalid Port 3: USSD Expected 4: Pending USSD 5: SIM Unregistered 6: Timeout 7: Server Error 8: SMS expected 9: TO expected 10: Pending Transaction 11: TID Expected 12: FROM Expected 13: Duplicated TaskId 14: Unauthorized 15: Invalid CMD 16: Too Many Task If task status ID not equal to 0, then means this task not received by device.	None	Y

5.3.2 Task send report

5.3.2.1 URL

Server or device configuration decision.

5.3.2.2 Parameter

Parameter	Description	Default	Required	Remark
Version	API version	1.1	Y	This document describes specification support only

5.3.2.3 Data

Status-report message is a JSON array composed by one or more task send report. Parameter “Content-Type” in HTTP head should set to

“application/json;charset=utf-8” .

`{"type": "status-report", "rpt_num": n, "rpts": [{"tid": tid_1, ...}, ..., {"tid": tid_n, ...}]}`

Components state:

Parameter	Data	Description	Default	Required
-----------	------	-------------	---------	----------

	type			
type	string	Message type	None	Y (status-report)
rpt_num	string	Report num	1	Y
rpts	Array	Detail status report	None	Y

Attributes reported in json data

Parameter	Data type	Description	Default	Required
tid	Int	related task ID .	None	Y
sending	Int	total num of SMS in sending.	None	Y
sent	Int	total num of SMS successfully send.	None	Y
failed	Int	total num of SMS failed send.	None	Y
unsent	Int	total SMS in cache waiting for send	None	Y
sdr	array	Successfully send details(one list for one num) Success report is a array, [0]: recipients num index(based on group sending), int [1]: num, string [2]: SMS sending port(1.01,2.02,...), string [3]: SMS send timestamp in UTC time, int	None	N
fdr	array	Fail send details(one num one list) [0]: recipients num index(based on group sending), int [1]: num, string [2]: SMS sending port(1.01,2.02,...), string [3]: SMS send timestamp in UTC time.int [4]: Progress reason, code+details[refer to 1.0 API] [5]: Carrier reason, code+ description. Valid when [4] is failed to send	None	N

Tips:

1. tid related to the task ID in the send-sms message.
2. sending, sent, failed are accumulated num in one task.
3. Sdr(successfully send record) list records between 2 status-report, server should keep before details.
4. fdr(failed detail record) list records between 2 status-report, server should keep before details.

5.3.3 Pause the SMS task

5.3.3.1 URL

http://host:port/goip_pause_sms.html

host: Device IP address

port: Device webpage management port, default value is 80.

5.3.3.2 Parameter

Parameter	Description	Default	Required	Remark
version	API version	1.1	Y	This document describes specification support only
username	Device username	None	Y	
password	Device password	None	Y	

5.3.3.3 Data

The data (the body segment of the HTTP message) is a JSON format string consisting of one or more tasks, and the value of the HTTP header parameter "Content-Type" is "application/json;charset=utf-8".

```
{ "tids" : [tid1, tid2, ..., tidn]}
```

Components state:

Parameter	Data type	Description	Default	Required
tids	String	Restore one or more tasks ID that are sent.	None	No. When there is no field, all send tasks are suspended.

The body of the query response is a JSON format string consisting of one or more tasks. The value of the HTTP header parameter "Content-Type" is "application/json; charset=utf-8".

```
{ "code" : 200, "reason" : "OK", "results" : [ { "tid" : tid_1, "status" : "0 OK" }, ..., { "tid" : tid_n, "status" : "2 Invalid Port" } ] }
```

Components state:

Parameter	Data type	Description	Default	Requ
code	Int	Interface processing result code	None	Y

reason	String	Interface processing results	None	Y
results	Array	Task processing results. When there is no tids in the request, this field is not included in the result.	None	N
tid	Int	Task ID	None	N
status	String	Task status code 0: OK 1: Invalid User 2: Invalid Port 3: USSD Expected 4: Pending USSD 5: SIM Unregistered 6: Timeout 7: Server Error 8: SMS expected 9: TO expected 10: Pending Transaction 11: TID Expected 12: FROM Expected If task status ID not equal to 0, then means this task not received by device.	None	N

5.3.4 Resume the paused SMS task

5.3.4.1 URL

http://host:port/goip_resume_sms.html

host: device IP address

port: device web port, the default is 80, optional.

5.3.4.2 Parameter

Parameter	Description	Default	Required	Remark
version	API version	1.1	Y	This document describes specification support only
username	Device username	None	Y	
password	Device password	None	Y	

5.3.4.3 Data

Data(The body segment of the HTTP message) is a JSON array composed by one or more task. Parameter Content-Type in HTTP head should set to

“application/json;charset=utf-8”.

```
{ "tids" : [tid1, tid2, ..., tidn]}
```

Attributes instructions:

Parameter	Data type	Description	Default	Required
tids	String	The task ID to be restored	None	NO. Restore all sending tasks when there is no field

The body of response is a JSON array composed by one or more task ID.

Parameter "Content-Type" in HTTP head should set to "application/json;charset=utf-8".

```
{ "code" : 200, "reason" : "OK", "results" : [{ "tid" : tid_1, "status" : "0 OK" }, ..., { "tid" : tid_n, "status" : "2 Invalid Port" } ] }
```

Attributes instructions:

Parameter	Data type	Description	Default	Required
code	Int	Interface processing result code	None	Y
reason	string	Interface processing results	None	Y
results	array	Task processing results	None	Y
tid	Int	Task ID	None	Y
status	string	The status code and reason description of the task 0: OK 1: Invalid User 2: Invalid Port 3: USSD Expected 4: Pending USSD 5: SIM Unregistered 6: Timeout 7: Server Error 8: SMS expected 9: TO expected 10: Pending Transaction 11: TID Expected 12: FROM Expected If the task's response code is not 0, it indicates that the task is not accepted by the device.	None	Y

5.3.5 Delete the SMS task.

5.3.5.1 URL

```
http://host:port/goip_remove_sms.html
```

host: device IP address.

port: device web port, the default is 80, optional.

5.3.5.2 Parameter

Parameter	Description	Default	Required	Remark
version	API version	1.1	Y	This document describes specification support only
username	Device username	None	Y	
password	Device password	None	Y	

5.3.5.3 Data

Data(The body segment of the HTTP message)is a JSON array composed by one or more task. Parameter Content-Type in HTTP head should set to

“application/json;charset=utf-8” .

```
{ "tids" : [tid1, tid2, ..., tidn]}
```

Attributes instructions:

Parameter	Data type	Description	Default	Required
tids	String	The task ID to be restored.	None	NO. Restore all sending tasks when there is no field.

The body of response is a JSON array composed by one or more task ID. Parameter “Content-Type” in HTTP head should set to “application/json;charset=utf-8” .

```
{ "code" : 200, "reason" : "OK", "results" : [{ "tid" : tid_1, "status" : "0 OK" }, ..., { "tid" : tid_n, "status" : "2 Invalid Port" } ] }
```

Attributes instructions:

Parameter	Data type	Description	Default	Required
code	Int	Interface processing result code	None	Y
reason	string	Interface processing results	None	Y
results	array	Task processing results 当请求中没有tids时，结果中不带本字段	None	Y
tid	Int	Task ID	None	Y
status	string	The status code and reason description of the task 0: OK	None	Y

		1: Invalid User 2: Invalid Port 3: USSD Expected 4: Pending USSD 5: SIM Unregistered 6: Timeout 7: Server Error 8: SMS expected 9: TO expected 10: Pending Transaction 11: TID Expected 12: FROM Expected If the task's response code is not 0, it indicates that the task is not accepted by the device.		
--	--	---	--	--

5.3.6 Query the SMS task

5.3.6.1 URL

http://host:port/goip_get_tasks.html?version=xxx&username=root&password=root&port=xx&pos=xxx&num=xxx&has_content=xx

host: device IP address.

port: device web port, the default is 80, optional.

5.3.6.2 Parameter

Parameter	Description	Default	Required	Remark
version	API version	1.1	Y	This document describes specification support only
username	Device username	None	Y	
password	Device password	None	Y	
port	Send port. Starting from 1	None	Y	
Has_content	Whether to bring a text message in the result.	0	N	0 - Do not return text message content. 1 - return text message content
Pos	The starting position of the request. 0 represents the beginning of the first task.	None	Y	The location of this field is in the order of the submission of the message task order
Num	The number of	10	N	

	Request messages.			
--	-------------------	--	--	--

The body of response is a JSON array composed by one or more task ID. Parameter Content-Type in HTTP head should set to `“application/json;charset=utf-8”`.

```
{ “tids” : [tid1, tid2, ..., tidn]}
```

Attributes instructions:

Parameter	Data type	Description	Default	Required
tids	String	The task ID to be query.	None	N

The body of response is a JSON array composed by one or more task ID. Parameter “Content-Type” in HTTP head should set to `“application/json;charset=utf-8”`.

```
{ “ code ” :200, “ reason ” : “ OK ” , “total_num” :n “task_num” :n,
“tasks” :[{ “tid” :tid_1, ...},..., { “tid” :tid_n, ...}]
```

Attributes instructions:

Parameter	Data type	Description	Default	Required
code	Int	Interface processing result code.	None	Y
reason	string	Interface processing results	None	Y
Total_num	Int	The number of tasks.	None	Y
Task_num	Int	Query the number of tasks returned.	None	Y
Tasks	Array	Query the returned array of tasks.	None	Y

Attributes instructions of task:

Tasks	array	Query the returned array of tasks.	None	Y
Tid	Int	Task id	None	Y
From	string	One or more (commas, short horizontal connections) send ports (from 1)	Device selection	N
To	string	One or more (comma connected) message receiver number.	None	Y
Sms	string	Message content	None	N
Chs	string	Code set (utf8 base64)	Utf-8	N
Coding	Int	Specifies the encoding of the message sent. 0: Do not specify 1: USC2 2: 7bit	0	N
State	Int	Task status:	None	Y

		0 - normal, 1 - suspended.		
--	--	----------------------------	--	--

5.4 Example

5.4.1 Status notification

Url:

http://192.168.1.67:80/goip_get_status.html?url=http://192.168.1.142&period=60&username=root&password=root

Response:

```

{
  "type": "dev-status",
  "seq": 3,
  "expires": 60,
  "mac": "00-30-f1-00-6c-55",
  "ip": "192.168.1.67",
  "ver": "532-604-924-041-100-000",
  "max-ports": 32,
  "max-slot": 4,
  "status": [
    {
      "port": "1.01",
      "sim": "",
      "seq": 8,
      "st": 3,
      "imei": "898610599441327",
      "iccid": "89860116289910033431",
      "imsi": "460014978212473",
      "sn": "",
      "opr": "46001 CHINA UNICOM GSM",
      "bal": "0.00",
      "sig": 15,
      "tot_dur": "0/-1",
      "mon_dur": "0/-1",
      "day_dur": "0/-1"
    }
  ]
}

```

5.4.2 Send commend

Url: http://192.168.1.67:80/goip_send_cmd.html?Username=root&password=root

Body: {"type":"command", "op":"switch", "ports":"2.02"}

Response:

```

1 {
2   "code": 0,
3   "reason": "OK"
4 }

```

5.4.3 Send SMS

Url:

http://192.168.1.67:80/goip_post_sms.html?username=root&password=root

Body:

```
{"type": "send-sms", "task_num": 1, "tasks": [{"tid": 1223, "to": "13686876620", "sms": "hello123"}]}
```

Response:

```
{
  "code": 200,
  "reason": "OK",
  "type": "task-status",
  "status": [
    {
      "tid": 1223,
      "status": "0 OK"
    }
  ]
}
```

5.4.4 Pause the SMS task

Url:

http://192.168.1.67:80/goip_pause_sms.html?username=root&password=root

Body:

```
{"tids": [2, 3]}
```

Response:

```
1 {
2   "code": 200,
3   "reason": "OK",
4   "results": [
5     {
6       "tid": 2,
7       "status": "0 OK"
8     },
9     {
10      "tid": 3,
11      "status": "0 OK"
12    }
13  ]
14 }
```

5.4.5 Resume the paused SMS task

Url:

http://192.168.1.67:80/goip_resume_sms.html?Username=root&password=root

Body:

```
{"tids": [2, 3]}
```

Response:

```

1  {
2    "code": 200,
3    "reason": "OK",
4    "results": [
5      {
6        "tid": 2,
7        "status": "0 OK"
8      },
9      {
10       "tid": 3,
11       "status": "0 OK"
12     }
13   ]
14 }

```

5.4.6 Delete the SMS task

Url:

http://192.168.1.67:80/goip_remove_sms.html?Username=root&password=root

Body:

`{"tids": [2, 3]}`

Response:

```

1  {
2    "code": 200,
3    "reason": "OK",
4    "results": [
5      {
6        "tid": 2,
7        "status": "0 OK"
8      },
9      {
10       "tid": 3,
11       "status": "0 OK"
12     }
13   ]
14 }

```

5.4.7 Query the SMS task

Url:

http://192.168.1.67:80/goip_get_tasks.html?version=1.1&username=root&password=root&port=1&pos=0&has_content=1

Response:

```

{
  "code": 200,
  "reason": "OK",
  "total_num": 5,
  "task_num": 5,
  "tasks": [
    {
      "tid": 2,
      "state": 0,
      "from": "",
      "to": "13686876820",
      "chs": "utf8",
      "coding": 0,
      "sms": "hello123"
    },
    {
      "tid": 3,
      "state": 0,
      "from": "",
      "to": "13686876820",
      "chs": "utf8",
      "coding": 0,
      "sms": "hello123"
    },
    {
      "tid": 4,
      "state": 0,
      "from": "",
      "to": "10010",
      "chs": "utf8",
      "coding": 0,
      "sms": "CYFE"
    }
  ]
}


```

6 Receive the SMS

Device will send SMS to server by POST request, while it get SMS from operator.

6.1 Topology

While forwarding SMS, device send a request to server first, so even device in LAN, and server in a public net, it also can work effectively

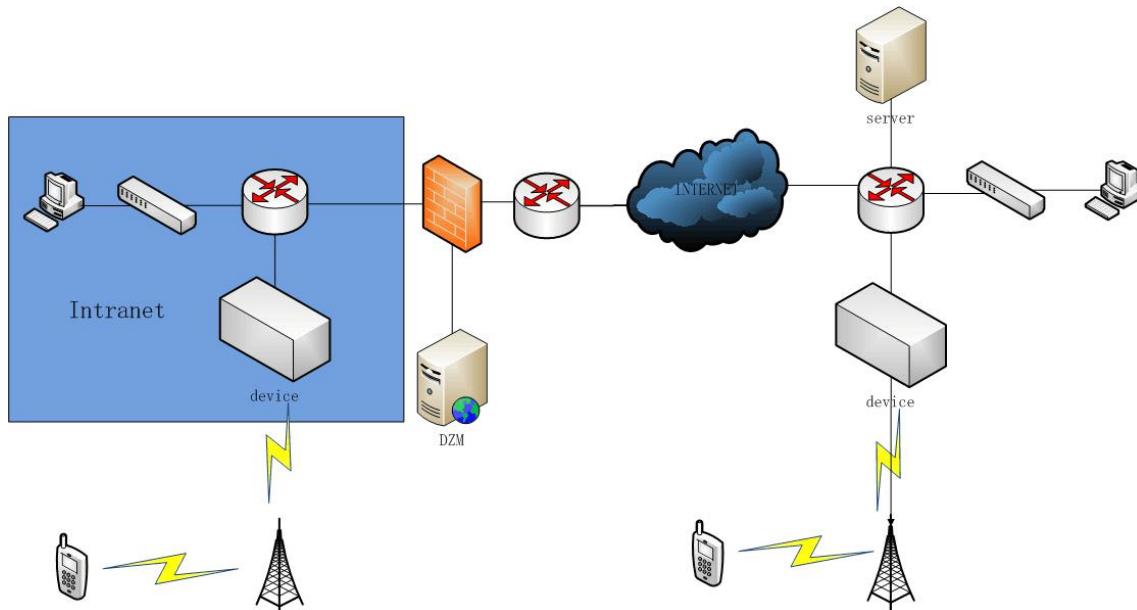

6.2 Message description

6.2.1 URL

Default set by device, server can revise it in SMS sending quest message.

6.2.2 Parameter

Parameter	Description	Default	Required	Remark
version	API version	1.1	Y	This document describes specification support only

6.2.3 Data

A JSON format string consisting of one or more short messages. The value of the HTTP header parameter "Content-Type" is "application/json;charset=utf-8".

```
{ "type" : "recv-sms" , "sms_num" : n, "sms" : [ [], ..., [] ] }
```

Attributes instructions:

Parameter	Data type	Description	Default	Required
type	String	Data type	None	Y (recv-sms)
sms_num	String	Total SMS num	None	Y
sms	Array	SMS array	None	Y

For saving the bandwidth, SMS content also storage in a array.

[0]: Delivery report flag, 0:normal SMS, 1:This is a delivery report

[1]: Receive report('1.01' , ' 1.02')

[2]: timestamp while device got this SMS

[3]: Sender(If Delivery report flag set to 1, then sender should be SMCC)

[4]: Recipient(If Delivery report flag set to 1, then recipient should be the original recipient.)

[5]: SMS content:

Delivery report: "code scts", code is 0 for successful delivery, utf-8

Ordinary SMS: BASE64 encoding of utf-8

7 Query SMS

Customers can actively query the SMS received by the device through HTTP

GET/POST request.

7.1 Query process

1. Query all messages received by the device without the query parameters (except for user-verified parameters).
2. Use the value of next_sms returned by the device as the value of the sms_id parameter to query subsequent SMS messages.
3. If the device restarts, return a different ssrc synchronization source ID and return to step 1.
4. Repeat step 2

7.2 Message description

7.2.1 URL

http://host:port/goip_get_sms.html?username=root&password=root&sms_id=xxx&sms_num=xxx

host: Device IP address

port: Device webpage management port, default value is 80.

7.2.2 Parameter

Parameter	Description	Default	Required	Remark
sms_id	Start SMS ID	1	N	1: The first SMS ID received by the device
sms_num	Specify the number of SMS to be queried	0	N	0: Query all SMS
sms_del	Delete the SMS that has been returned by the query	0	N	0: Do not delete, 1: delete

7.2.3 Data

A JSON format string consisting of one or more short messages. The value of the HTTP header parameter "Content-Type" is "application/json;charset=utf-8".

```
{
  "code": 0,
  "reason": "OK",
  "ssrc": "0123456789abcdef",
  "sms_num": 2,
  "next_sms": 3,
  "data":
  [
    [0, "1B",
    1466506477, "10010", "13265825775", "5bCK5pWs55qE55So5oi377yM5oKo5aW977yB5o6o6I2Q5oKo5L2/55So
```

```
44CQ5omL5py66JC15Lia5Y6F44CR5LiA56uZ5byP5YWN5rWB6YeP5pyN5Yqh5bmz5Y+wIGhOdHA6Ly91LjEwMDEwLm
NuL2ROy2Qg77yM6L275p2+5p+16K+i6K+d6LS544CB5L2Z6aKd5Y+K6K+m5Y2V77yb5oiW5Zue5aSN5Lu15LiL5pWw
5a2X5LuJ56CB6I635Y+W5oKo6ZyA6KaB55qE5pyN5Yqh77yaDQoxMDEu5b2T5pyI6K+d6LS577ybDQoxMDIu5Y+v55
So5L2Z6aKd77ybDQowLuWNh+e6pzRH77ybDQoxLuivneiOueWPiuenr+Wihu+8mw0KMi7otKbmiLfmn6Xor6LvVJsN
CjMu5YWF5YC877ybDQo0LuWuouaIt+acjeWKoe+8mw0KNS7kuJrliqHlip7nkIbvVJsNCjYu5aKe5YC85Lia5Yqh77
ybDQo3LuecgeS7veS4k+WMuu+8mw0KOS7ng63ngrnkV4PplIDjgIINCuW5v+S4n0iB10mAmuOAggAAAAA="],
[0, "1B",
1466506670, "10010", "13265825775", "5bCK5pWs55qE55So5oi377yM5oKo5aW977yB5o6o6I2Q5oKo5L2/55So
44CQ5omL5py66JC15Lia5Y6F44CR5LiA56uZ5byP5YWN5rWB6YeP5pyN5Yqh5bmz5Y+wIGhOdHA6Ly91LjEwMDEwLm
NuL2ROy2Qg77yM6L275p2+5p+16K+i6K+d6LS544CB5L2Z6aKd5Y+K6K+m5Y2V77yb5oiW5Zue5aSN5Lu15LiL5pWw
5a2X5LuJ56CB6I635Y+W5oKo6ZyA6KaB55qE5pyN5Yqh77yaDQoxMDEu5b2T5pyI6K+d6LS577ybDQoxMDIu5Y+v55
So5L2Z6aKd77ybDQowLuWNh+e6pzRH77ybDQoxLuivneiOueWPiuenr+Wihu+8mw0KMi7otKbmiLfmn6Xor6LvVJsN
CjMu5YWF5YC877ybDQo0LuWuouaIt+acjeWKoe+8mw0KNS7kuJrliqHlip7nkIbvVJsNCjYu5aKe5YC85Lia5Yqh77
ybDQo3LuecgeS7veS4k+WMuu+8mw0KOS7ng63ngrnkV4PplIDjgIINCuW5v+S4n0iB10mAmuOAggAAAAA="]
]
}
```

Property description:

Parameter	Data type	Description	Default	Required
code	int	Operation code	None	Y
reason	string	Reason description	None	Y
ssrc	string	Synchronization source identifier The device generates a new ssrc each time it runs. So the value changes, re-query	None	Y
sms_num	int	Number of SMS queried	None	Y
next_sms	int	The next SMS ID	None	Y
data	int	Queried SMS content	None	Y

For saving the bandwidth, SMS content also storage in a array.

[0]: Delivery report flag, 0:normal SMS, 1:This is a delivery report
 [1]: Receive report('1.01' , ' 1.02')

[2]: timestamp while device got this SMS

[3]: Sender(If Delivery report flag set to 1, then sender should be SMCC)

[4]: Recipient(If Delivery report flag set to 1, then recipient should be the original recipient.)

[5]: SMS content:

Delivery report: "code scts", code is 0 for successful delivery, utf-8
 Ordinary SMS: BASE64 encoding of utf-8

8 Query SMS statistics

The client can actively query the short message statistics of the device through the HTTP GET request.

8.1 Message description

8.1.1 URL

http://host:port/goip_get_sms_stat.html?version=xxx&username=xxx&password=xxx&ports=xxx&slots=xxx&type=xxx

host: Device IP address

port: Device webpage management port, default value is 80.

8.1.2 Parameter

Parameter	Description	Default	Required	Remark
version	API version	1.0	N	1.0:Compatible with previous API 1.1: Support for the description of this document
username	Device Username	None	Y	
password	Device password	None	Y	
ports	The specified port number (valued from 1). The values are as follows: 1) all: all ports; 2) 2: Specify a single port; 3) 1-2, 4: Port numbers separated by short numbers, specifying multiple ports, where "-" indicates a continuous port number;	all	N	
slots	The specified card slot number (value from 1). The values are as follows: 1) Do not specify: current card 2) all: all card slots;	Current card	N	

	3) 2: Specify a single card slot; 4) 1-2, 4: A card slot number separated by a short number, specifying a plurality of card slots, where "-" indicates a continuous card slot number;			
type	statistic type. The values are as follows: 1) 0: The last hour; 2) 1: The last two hours; 3) 2: today; 4) 3: cumulative;	0	N	

8.1.3 Response

The body of the response is a JSON array, and the value of the HTTP header parameter "Content-Type" is "application/json; charset=utf-8".

```
{ "code" :200, "reason" : "OK", "count" :n, "stats" :[{ "port" :xxx, ...}, ...]}
```

Property description:

Parameter	Data type	Description	Default	Required
code	int	Interface processing result code	None	Y
reason	string	Interface processing result reason	None	Y
count	int	Number of statistical results	None	Y
stats	stat result array	Array of statistical results (stat results are as follows)	None	Y

stat result description:

Parameter	Data type	Description	Default	Required
port	int	Port number (value from 1)	None	Y
slot	int	Slot number (value from 1)	None	Y
received	int	Number of SMS received	None	Y
sent	int	Number of SMS sent	None	Y
sent_ok	int	Number of successful SMS sent	None	Y
sent_failed	int	Number of failed SMS sent	None	Y
con_failed	int	Number of consecutive failed SMS	None	Y
unsent	int	Number of unsent SMS	None	Y
sending	int	Number of SMS being sent	None	Y

9 Query call statistics

The client can actively query the call statistics of the device through the HTTP GET request.

9.1 Message description

9.1.1 URL

`http://host:port/goip_get_call_stat.html?version=xxx&username=xxx&password=xxx&ports=xxx&slots=xxx&type=xxx`

host: Device IP address

port: Device webpage management port, default value is 80.

9.1.2 Parameter

Parameter	Description	Default	Required	Remark
version	API version	1.0	N	1.0: Compatible with previous API 1.1: Support for the description of this document
username	Device Username	None	Y	
password	Device password	None	Y	
ports	The specified port number (valued from 1). The values are as follows: (1) all: all ports; (2) 2: Specify a single port; (3) 1-2, 4: Port numbers separated by short numbers, specifying multiple ports, where "-" indicates a continuous port number;	all	N	

slots	The specified card slot number (value from 1). The values areas follows: (1) Do not specify: current card (2) all: all card slots; (3) 2: Specify a single card slot; (4) 1-2, 4: A card slot number separated by a short number, specifying a plurality of card slots, where "-" indicates a continuous card slot number;	Current card	N	
type	statistic type. The values are as follows: (1) 0: The last hour; (2) 1: The last two hours; (3) 2: today; (4) 3: cumulative;	0	N	

9.1.3 Response

The body of the response is a JSON array, and the value of the HTTP header parameter "Content-Type" is "application/json;charset=utf-8".

```
{ "code" :200, "reason" : "OK" , "count" :n, "stats" :[{"port" :xxx, ...}, ...]}
```

Property description:

Parameter	Data type	Description	Default	Required
code	int	Interface processing result code	None	Y
reason	string	Interface processing result reason	None	Y
count	int	Number of statistical results	None	Y
stats	stat result array	Array of statistical results (stat results are as follows)	None	Y

stat result description:

Parameter	Data type	Description	Default	Required
port	int	Port number (value from 1)	None	Y
slot	int	Slot number (value from 1)	None	Y
calls	int	Number of calling	None	Y
alerted	int	Number of alerting	None	Y

connected	int	Number of connected calls	None	Y
con_failed	int	Number of failed calls	None	Y
nc	string	No Carriers success ratio ("n/m"), the numerator n is the success number, and the denominator m is the total number	None	Y
pdd	int	PDD	None	Y
acd	int	ACD	None	Y
asr	int	ASR percentage value, for example, asr is 43, which is 43%	None	Y
tcd	int	Cumulative call duration (minutes)	None	Y
act_tcd	int	(actual) actual cumulative call duration (seconds)	None	Y